



Jet 35

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

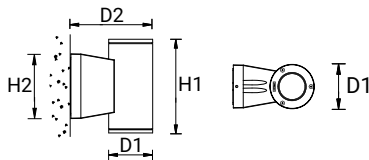

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30341 - N - W27	2 x 1 COB	28	2043	2700K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W27	2 x 1 COB	28	2057	2700K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W27	2 x 1 COB	28	2043	2700K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W27	2 x 1 COB	28	1784	2700K	A++	71°	2.3	102	189	218	150
JE-30341 - N - W30	2 x 1 COB	28	2174	3000K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W30	2 x 1 COB	28	2190	3000K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W30	2 x 1 COB	28	2175	3000K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W30	2 x 1 COB	28	1899	3000K	A++	71°	2.3	102	189	218	150
JE-30341 - N - W40	2 x 1 COB	28	2198	4000K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W40	2 x 1 COB	28	2214	4000K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W40	2 x 1 COB	28	2199	4000K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W40	2 x 1 COB	28	1920	4000K	A++	71°	2.3	102	189	218	150

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30341 - N - W30 - DI		
Beam	Colour	Dim Type
Colour Temperature W27 – Warm 2700K W30 – Warm white 3000K W40 – Neutral white 4000K		
Dimming Type ND – Non dimmable DI – 1-10V dimming DA – DALI dimming		

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 35

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

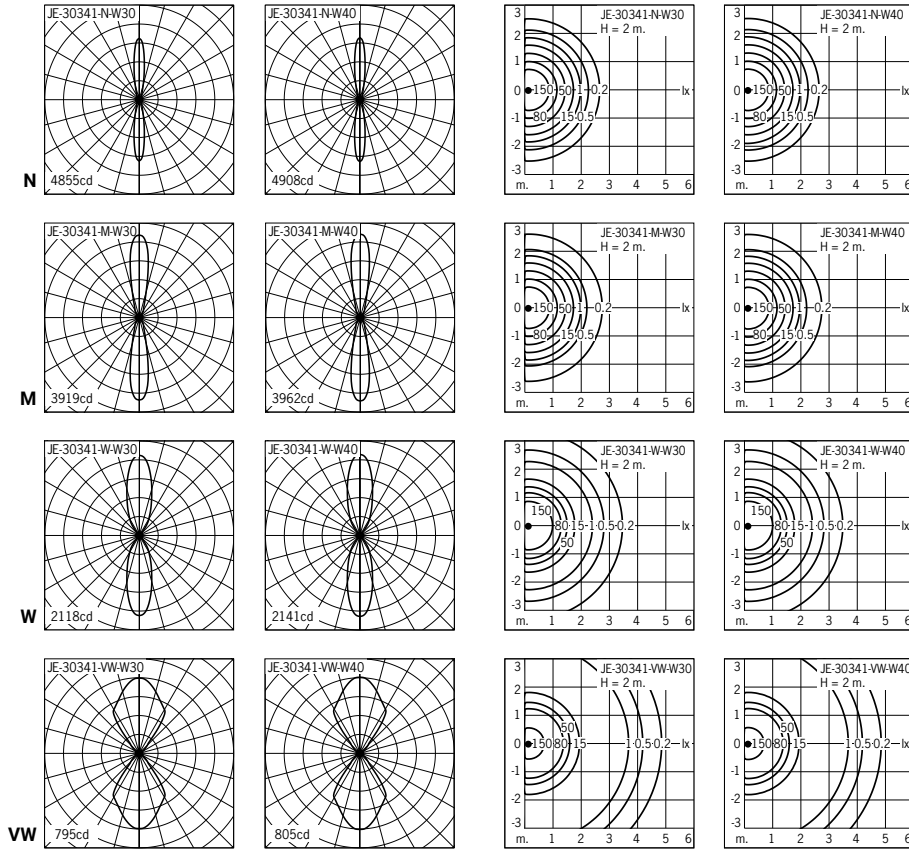

• Installation manual available online at www.ligman.com.
 • Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 • Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.