


► NEW RANGE OF DIAMOND DRILL BITS

	REF.	Ø MM	Ø INCHES	RPM	HEIGHT SEG. MM	HEIGHT MM	SPECIAL WAX
DIAMOND DRILL BITS M14				MAX. RPM			
 USE WITH GRINDER	507506	6	1/4 "	14000	10	35	✓
	507508	8	5/16"	14000	10	35	✓
	5075010	10	25/64"	14000	10	35	✓
	5075012	12	15/32"	14000	10	35	✓
	5075014	14	35/64"	14000	10	35	✓
	5075015	15	19/31"	14000	10	35	✓
	5075018	18	45/64"	14000	10	35	-
	5075020	20	25/32"	14000	15	50	-
	5075022	22	55/64"	14000	15	50	-
	5075025	25	63/64"	14000	15	50	-
	5075028	28	17/64"	14000	15	50	-
	5075035	35	1 3/8"	14000	15	50	-
	5075045	45	1 49/64"	14000	15	50	-
	5075050	50	1 31/32"	14000	15	50	-
	5075060	60	2 23/64"	14000	15	40	-
	5075065	65	2 9/16"	14000	15	40	-
	5075068	68	2 43/69"	14000	15	40	-
	5075080	80	3 5/32"	14000	15	40	-
ADAPTOR (TO GO FROM M14 TO HEX 12)				MIN. RPM			
	50750M14	-	-	1500	-	-	-
DIAMOND DRILL BITS HEX 6.5				MIN. RPM			
 USE WITH DRILL (HAMMERLESS)	507516	6	1/4"	1500	10	35	✓
	507518	8	5/16"	1500	10	35	✓
	5075110	10	25/64"	1500	10	35	✓
	5075112	12	15/32"	1500	10	35	✓
	5075114	14	35/64"	1500	10	35	✓
DIAMOND DRILL BITS KIT M14				MAX. RPM			
 USE WITH GRINDER	50750KIT	6		14000	10	35	✓
		8					
		10					
		12					
	50750KIT1	25		14000	15	40	-
DIAMOND DRILL BIT KIT HEX 6.5				MIN. RPM			
 USE WITH DRILL (HAMMERLESS)	50751KIT	6		1500	10	35	✓
		8					
		10					
		12					
	50750GUIDE						



C/ Urola, 10
20230 Legazpi.
Guipúzcoa. España

+00 34 943 73 90 00
+00 34 943 73 90 00

www.bellota.com

THE
ONLY WAY
TO DRILL
PROPERLY
PORCELAIN
TILES

FAST & CLEAN

It does not heat up.
It does not wear away.
It does not break the porcelain tile.



► DRY CUT DIAMOND DRILL BITS

WORK FASTER, LAST LONGER

To drill holes without water and make vertical cuts (walls, partition walls, etc.) and horizontal cuts.



► JUST LEAVE THE DIAMOND DRILL WORK

Numbers of holes in porcelain:

DIAMOND DRILL WITH WAX
(small sizes)

46

(holes in porcelain)

DIAMOND DRILL WITH AIR
(medium and big sizes)

150

(holes in porcelain)



FAST AND CLEAN CUT


Unique technology using vacuum brazing that improves the adhesion of the diamond drill bit to deliver more strength. Minimum diamond drill bit height segment 10 mm.

PRECISION CUT

Special steel body with openings that cool the bit and remove the chips during cutting. Special wax is incorporated in diameters smaller than 15 mm to make cutting easier and to cool down the bit.

COMPATIBILITY

It can be used for the grinder and the drill (hammerless).

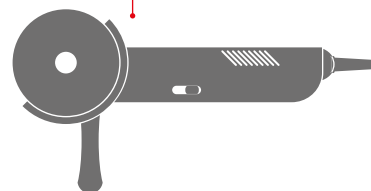

GRINDER

Suitable for Ref:

507506, 507508, 5075010,
5075012, 5075014, 5075015,
5075018, 5075020, 5075022,
5075025, 5075028, 5075035,
5075045, 5075050, 5075060,
5075065, 5075068, 5075080,
50750KIT, 50750KIT1



DRILL

Suitable for Ref:

507516, 507518,
5075110, 5075112,
5075114, 50751KIT



ADAPTOR


To convert from metric 14 (M14) to hexagon of 12 (HEX12). Use with drill (hammerless).

► TO BE USED IN

DIAMOND DRILLS	USE
6mm, 8mm	Plumbing, Placing mirrors, sreen, appliquees
10mm, 12mm, 14mm, 16mm, 18mm, 20mm, 22mm	Metal Carpentry Kitchen Installers
25mm, 35mm, 45mm, 50mm, 60mm 65mm, 68mm, 80mm	Tiling Installers
+25% / +50% LONGER LIFE	

► USER INSTRUCTIONS


It can be used for dry and wet cuts on materials such as CERAMIC, STONEWARE, PORCELAIN, GRANITE, RUSTIC MARBLE, STONE, ROOF TILES, BRICK and FIBREGLASS.

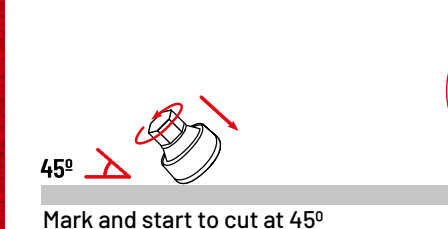


Mark and start to cut at 45°



Continue cutting and drive the drill to 75°

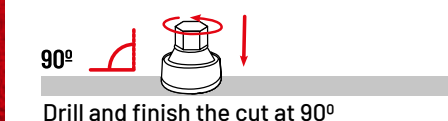

Drill and finish the cut at 90°

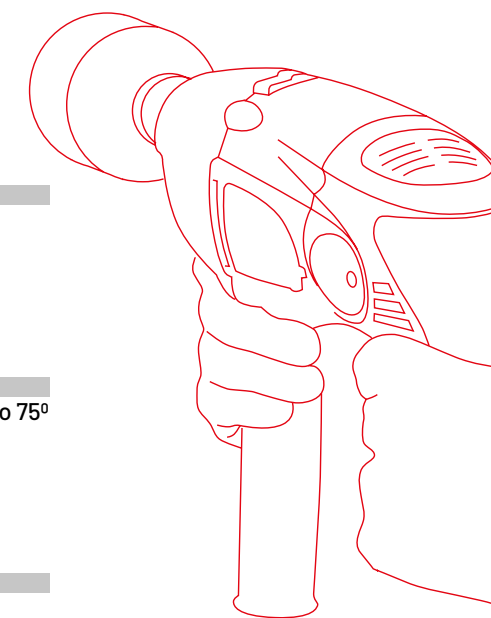

1
2
3