



clever

BATHROOM & KITCHEN TAPS

REF: 61017**DESCRIPTION:** Single-lever shower set mixer with extendable bar Box with sliding articulated support.**SERIES:** PANAM EVO XTREME**RANGE:** STYLES PRO**EAN:** 8425144238690**REGULATION:** UNE 19703, UNE-EN 817**PRODUCT IMAGE:****Included:****61040**


Support

60628

Hose

61046

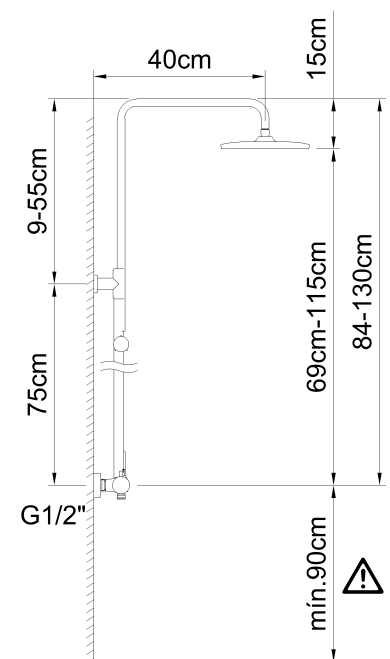
Shower head (2250)

61043

Handset

98497


Support

TECHNICAL DRAWING:**FINISH:**

Chrome

NUMBER OF FUNCTIONS:

3F

WARRANTY:**CERTIFICATIONS:****SPARE PARTS:****61018**
Body for shower set**61050**
Shower tube**61057**
Diverter cartridge**61314**
Diverter handle**95255**
Handle**99543**
Ceramic cartridge**TECHNOLOGIES:**Headwork/Diverter cartridge
with ceramic disc

Cold Open taps



Cartridge with 2 positions

This exploded view diagram illustrates the components of a water filter assembly. The parts are numbered as follows:

- 1**: Filter housing cap
- 2**: Filter housing O-ring
- 3**: Filter housing cap O-ring
- 4**: Filter housing cap screw
- 5**: Filter housing cap screw O-ring
- 6**: Filter housing
- 7**: Filter housing O-ring
- 8**: Filter housing cap screw
- 9**: Filter housing cap screw O-ring
- 10**: Filter housing cap screw
- 11**: Filter housing cap screw O-ring
- 12**: Filter housing cap screw
- 13**: Filter housing cap screw O-ring
- 14**: Filter housing cap screw
- 15**: Filter housing cap screw
- 16**: Filter housing cap screw
- 17**: Filter housing cap screw
- 18**: Filter housing cap screw

The diagram shows the assembly of the filter housing (6) with the cap (1) and O-rings (2, 3, 7). The cap is secured with screws (4, 5, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18). The filter housing (6) is connected to the main water line (16) via a fitting (17). The filter housing (6) is also connected to the main water line (16) via a fitting (17). The filter housing (6) is connected to the main water line (16) via a fitting (17). The filter housing (6) is connected to the main water line (16) via a fitting (17).

- This tap is designed exclusively for the supply of drinking water. Do not use it for any other liquids or substances that could compromise its safety or functionality.
- Always follow the installation, usage, and maintenance instructions provided by Standard Hidráulica, S.A.U.
- Before installation, ensure that the pipework is clean and free from debris that could affect the tap's performance.
- Use appropriate tools during installation to avoid damaging the tap. Do not over-tighten fittings, as this may cause mechanical failure and/or leaks.
- Adjust the hot water temperature to prevent burns. Be aware that the tap body may become hot during use, posing a risk of burns upon contact.
- Do not leave the tap running unattended to prevent overflows and unnecessary water wastage.
- Operate the tap only within the pressure and temperature limits specified by Standard Hidráulica, S.A.U. Using it outside these parameters may lead to damage or reduce the product's lifespan. If the mains water pressure is high, it is advisable to install a pressure-reducing valve to protect the tap from excessive strain.
- Before installing, handling, or dismantling the tap, close the shut-off valve and release any residual water pressure.
- Periodically inspect all connections and O-rings for leaks or signs of wear and replace components if necessary.
- For repairs, use only original spare parts recommended by Standard Hidráulica, S.A.U. to ensure compatibility and reliability.
- The tap contains small components. Keep them out of the reach of young children to eliminate choking hazards.
- Avoid using aggressive or abrasive cleaning agents, as these may damage the tap's surface finish or internal components.
- After installation, dispose of the packaging responsibly in accordance with local waste disposal regulations.
- At the end of the tap's service life, recycle or dispose of it in accordance with local regulations governing metal and plastic waste.