



AVNET[®]
EMBEDDED

SIMPLE PLUS OPEN FRAME

GEO-156R9B250C1200-MBVM-NG011-ONCELL

avnet.com/embedded

GEO-156R9B250C1200-MBVM-NG011-ONCELL

1 YEAR WARRANTY

15.6" OPEN FRAME

CERTIFICATIONS : CE , FCC

DESCRIPTION

Avnet Integrated Open Frame provides the answer, handling the entirety of the display design for you and building optimized solutions based on modular combinations of standard displays and TFT multi-touch assemblies. Delivered as a pre-assembled unit that incorporates the power supply, touch controller and other components, an Open Frame is built into a no-bezel metal housing for simple integration into your solution. All-in-one computers are a variation on this approach that add the processor, memory and other components to create a full system. Both allow for flexible mounting options to support an open-ended variety of implementations.



Advantages

Six capabilities of Avnet integrated Open Frames and AIO that mean successful solution development

Compatibility and Ease of Integration



- Integrate with multiple generations and standards of equipment
- Implement in environments with space, thermal and other constraints
- Customize easily for individual solution requirements

Optimized Human-Machine Interaction



- Tailor display to size, aspect ratio and resolution needed
- Control input without external devices such as keyboard or mouse
- Support use by operators with gloved hands

Rugged Durability and Longevity



- Offer dependability of low failure rate and long lifespan
- Operate in extremes of dust, heat, moisture, shock and vibration
- Protect displays against glare, scratches, fingerprints and vibration

Flexible Mounting and Customizability



- Specify options such as processor, video card and interfaces
- Mount in enclosure, on equipment, on panel or using VESA
- Meet constraints with fanless install and solid state storage

Long-Term Cost-Effectiveness



- Eliminate one-time-engineering costs to develop custom display
- Simplify ongoing maintenance with Avnet-engineered solution
- Scale system performance with upgradeability when needed

Low Power Consumption and Noise



- Tailor power/performance balance with broad choice of components
- Reduce operating noise by eliminating exhaust fans
- Avoid pulling in dust and contaminants with passive cooling designs

Technical Data

GEO-156R9B250C1200-MBVM-NG011-ONCELL


Panel Data	
Panel Size	15.6"
Display Ratio	16:9
Resolution	1920(RGB)×1080 FHD
Color	16.7M , 100% sRGB
Brightness (nits)	250cd/m2(Typ.)/200cd/m2(Min.)
Contrast	1200:1(Typ.) /1000cd/m2(Min.)
View Angle	85/85/85/85(Typ.)(CR≥10) /80/80/80/80(Min.)(CR≥10)
Response Time	20(Typ.)(G to G) ms
Backlight	WLED
Life (hrs)	30Khours

Technical Data

GEO-156R9B250C1200-MBVM-NG011-ONCELL

Specification	
Material	Metal material
Installation	VESA mounted
Signal Input	mini HDMI/USB C×2
Cover glass	1.1mm black
Cover glass + TFT	OCA bonding
Touch Screen	On cell
Speaker	8Ω×2
Consumption(Typical)	On: ≤10W Standby≤1W, Off≤1W
Interface	1*HDMI;2*USB C
Menu Language	Multilingual
Power Supply	DC 5V
Operating condition:	Temperature: 0℃ 50 ℃; Humidity:20-80%
Storage condition:	Temperature: -20℃ 60 ℃; Humidity: 20%-80%
Certificate	CE,FCC,ROHS

SIZE

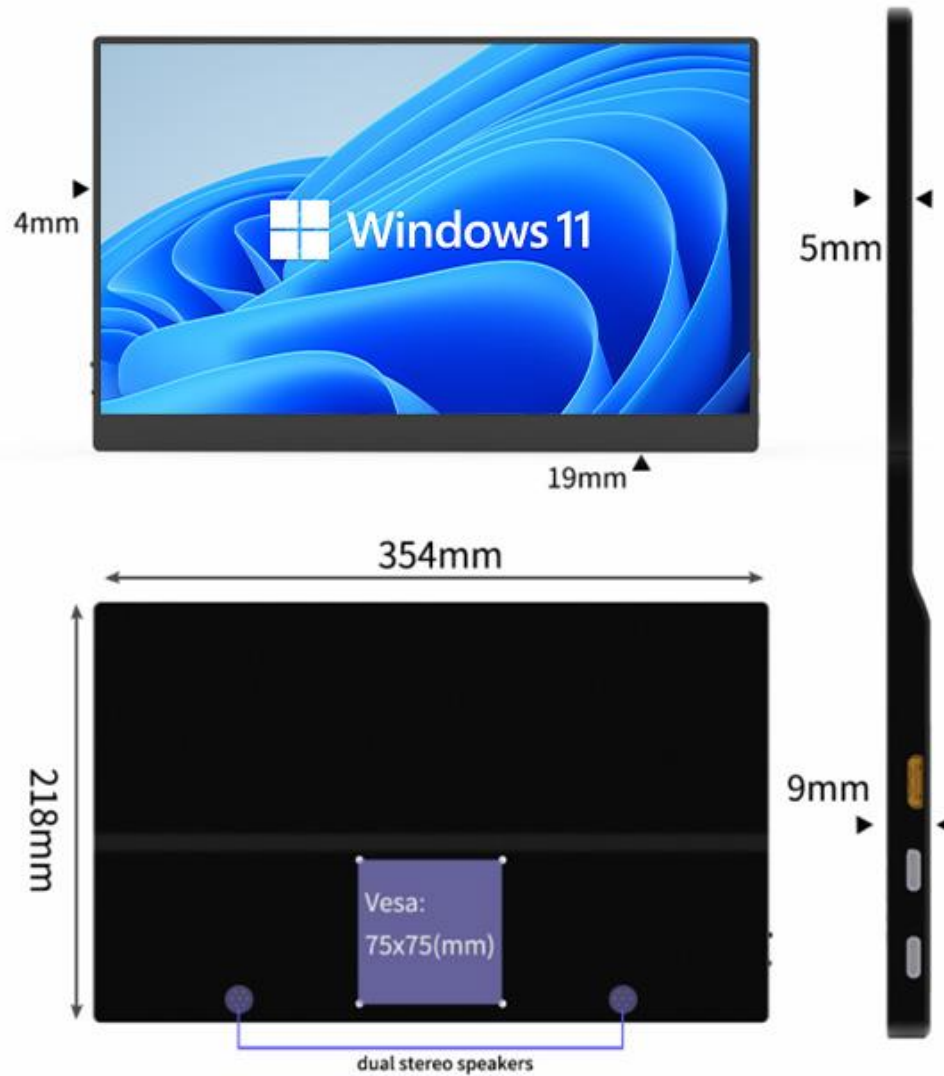

Avnet Embedded
MSC Technologies GmbH
Industriestr. 16
76297 Stutensee

embedded.avnet.com