




DIMENSIONS



AWARDS

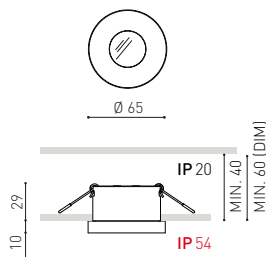

Name	PUCK RECESSED IP54 S DIM DALI/PUSH 3000K WT
Reference	A3140021WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5,68 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	42°
Unified Glare Rating	UGR<19
Lighting efficiency	80%
Efficacy	140 Lm/W
Current intensity	150 mA
Dimming	DALI / Push - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø59 mm.
Weight	193 g.
Packaged weight	235 g.
Packaging dimensions	139 x 133 x 59 mm.
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck Recessed is the Puck version for recessed applications. Puck Recessed aims to fulfill the functions of general lighting. Its discreet presence takes the shape of a circular piece, totally made of aluminium, with a slight rounded slant to hold the light source back a few centimetres.

POLAR DIAGRAM

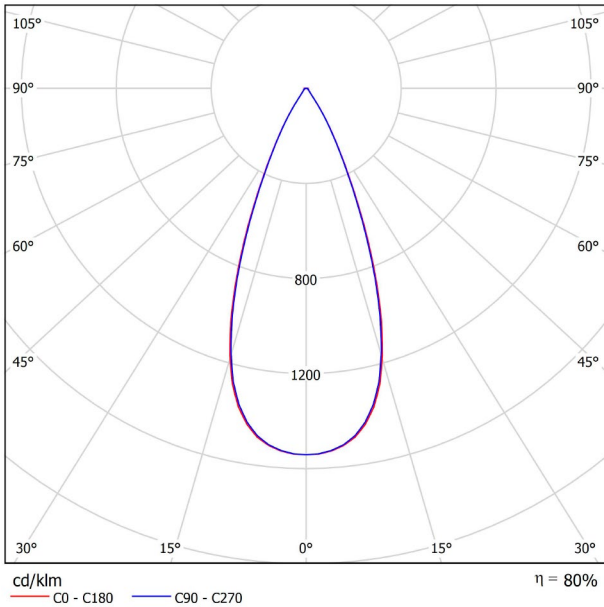

CONICAL DIAGRAM

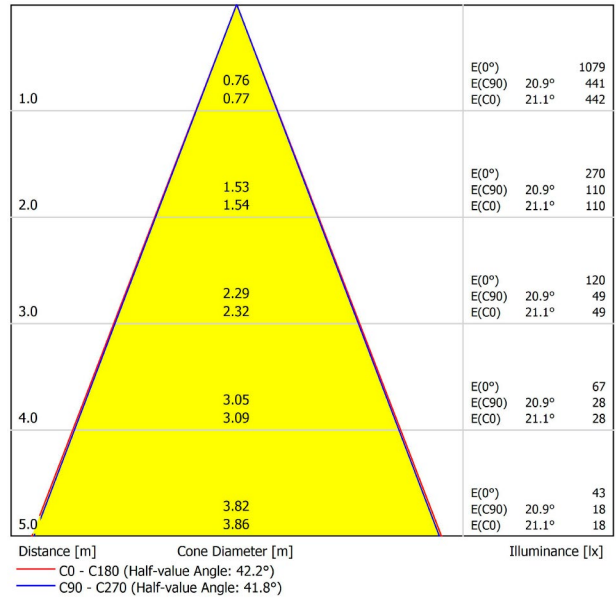

UGR

Glare Evaluation According to UGR													
ρ Ceiling	70	70	50	50	30	70	70	50	50	30			
ρ Walls	50	30	50	30	30	50	30	50	30	30			
ρ Floor	20	20	20	20	20	20	20	20	20	20			
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
2H	2H	7.8	8.5	8.1	8.7	8.9	8.2	8.9	8.5	9.1	9.3	11.6	12.2
3H	3H	11.1	11.7	11.4	12.0	12.2	11.6	12.2	11.9	12.4	12.7	13.9	14.7
4H	4H	12.4	13.0	12.7	13.2	13.5	12.8	13.4	13.1	13.7	13.9	15.0	15.7
6H	6H	13.6	14.1	13.9	14.4	14.7	13.9	14.4	14.2	14.7	15.0	16.4	17.2
8H	8H	14.3	14.9	14.7	15.2	15.5	14.6	15.1	14.9	15.4	15.7	17.2	18.0
12H	12H	15.0	15.5	15.4	15.8	16.1	15.3	15.8	15.6	16.1	16.4	18.0	19.2
4H	2H	8.7	9.3	9.0	9.6	9.8	9.0	9.6	9.3	9.8	10.1	12.7	13.5
3H	3H	12.4	12.9	12.7	13.2	13.5	12.7	13.2	13.1	13.5	13.9	15.2	16.4
4H	4H	13.8	14.2	14.1	14.5	14.9	14.1	14.5	14.5	14.9	15.2	16.4	17.2
6H	6H	15.1	15.4	15.5	15.8	16.2	15.3	15.6	15.7	16.0	16.4	17.2	18.0
8H	8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2	18.0	19.2
12H	12H	16.7	17.0	17.2	17.4	17.8	16.9	17.2	17.3	17.6	18.0	19.2	20.4
8H	4H	14.3	14.7	14.8	15.1	15.5	14.6	14.9	15.0	15.3	15.7	17.2	18.0
6H	6H	15.9	16.2	16.4	16.6	17.0	16.1	16.3	16.5	16.7	17.2	18.0	19.2
8H	8H	17.0	17.2	17.4	17.6	18.1	17.1	17.3	17.6	17.7	18.2	19.2	20.4
12H	12H	17.9	18.1	18.4	18.5	19.0	18.0	18.2	18.5	18.7	19.2	20.4	21.6
12H	4H	14.5	14.7	14.9	15.1	15.6	14.7	15.0	15.1	15.4	15.8	17.2	18.0
6H	6H	16.2	16.4	16.6	16.8	17.3	16.3	16.5	16.8	16.9	17.4	18.0	19.2
8H	8H	17.3	17.5	17.8	17.9	18.4	17.4	17.6	17.9	18.0	18.5	19.2	20.4
Variation of the observer position for the luminaire distances S													
S = 1.0H	+1.3 / -0.4					+1.2 / -0.4							
S = 1.5H	+2.7 / -0.7					+2.5 / -0.7							
S = 2.0H	+4.1 / -0.9					+4.0 / -0.9							
Standard table	BK07					BK07							
Correction Summand	0.5					0.6							
Corrected Glare Indices referring to 700lm Total Luminous Flux													